


Bush-hammered natural limestone pavement.
Thickness: 6-8cm
Joint: 1-5cm.
Irregular joint shape.



Deactivated concrete pavement with quartz and graded corundum aggregate 3/5mm.



Concrete pavement with a very high proportion of 15/25mm aggregate (aggregate incorporated into the surface)



Existing stone masonry wall.




Existing wall of sandstone (marès) pieces.




Reinforced concrete.




Sandstone-limestone piece measuring 80x20x40cm with M-5 mortar joints.



Loam soil.



Projected mortar with cork.

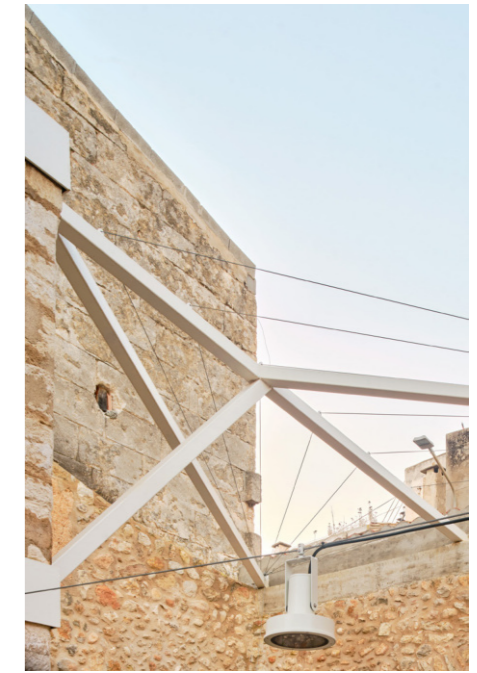

INTERIOR PUBLIC COURTYARD

Architects FLEXOARQUITECTURA (Aixa del Rey / Tomeu Ramis)

Category B / Espacios exteriores

Inscription code 07B 001737